


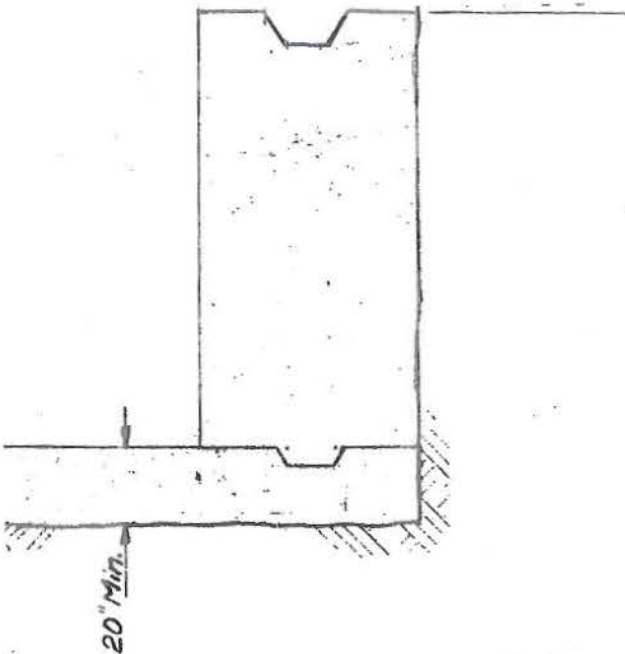

on this drawing see Dwg. No. 592-B-10, except as noted otherwise.

5. Floor at Elev. 9'-0" to have a 1 1/2" bonded finish.

6. For General Excavation Notes, see Dwg. 592-B-25.

NOTE WELL

At locations where new concrete is placed adjacent to existing concrete, the surfaces of the existing concrete at the construction joints shall be prepared by scrubbing with wire brushes until the aggregate is exposed in a bright, clean condition, then cover with a thin layer of neat cement grout immediate prior to the placing of the new concrete.

-C

T7-8

JMM 4-6-51 AG 4-5-51 4/5/51	PUBLIC SERVICE CO OF NH SCHILLER STATION PROJECT	
	JACKSON & MORELAND, ENGINEERS	BOSTON — NEW YORK
N.H. 19-51 4/5/51 T. H. HANCOCK T. H. HANCOCK T. H. HANCOCK	SCREEN HOUSE SUBSTRUCTURE CONCRETE OUTLINE — PLANS & SECTIONS	
RECORD NUMBER 4592	SCALE Unless otherwise noted 1/4 IN. = 1 FOOT	592-B-3

DA 592-76

AR-224